EM-10 electron microscope at an accelerating voltage of 60 kV.

N. B. Gilula and P. Satir, *J. Cell Biol.* **53**, 494 (1972).

A. M. Collier, W. A. Clyde, Jr., F. W. Denny, *Proc. Soc. Exp. Biol. Med.* **132**, 1153 (1969).

L. Hayflick, *Tex. Rep. Biol. Med.* **23**, 285 (1965).

We thank Drs. R. M. Brown, Jr., and D. W.

√ Sugn

Neural Axis Representing Target Range in the Auditory Cortex of the Mustache Bat

Abstract. *In echolocating bats, the primary cue for determining distance to a target is the interval between an emitted orientation sound and its echo. Whereas frequency is represented by place in the bat cochlea, no anatomical location represents target range. Target range is coded by the time interval between grouped discharges of primary auditory neurons in response to both the emitted sound and its echo. In the frequency-modulated–signal processing area of the auditory cortex of the mustache bat* (Pteronotus parnellii rubiginosus), *neurons respond poorly or not at all to synthesized orientation sounds or echoes alone but respond vigorously to echoes following the emitted sound with a specific delay from targets at a specific range. These range-tuned neurons are systematically arranged along the rostrocaudal axis of the frequency-modulated–signal processing area according to the delays to which they best respond, and thus represent target range in terms of cortical organization. The frequency-modulated–signal processing area therefore shows odotopic representation.*

In the mustache bat (*Pteronotus parnellii rubiginosus*), the auditory cortex has been found to have at least three specialized areas for processing different types of biosonar information: the Doppler-shifted constant-frequency (DSCF), frequency modulated (FM), and CF/CF processing areas (Fig. 1A) (*1–6*). Neurons of the DSCF processing area are arranged along two axes, one representing echo amplitude (target subtended angle), the other representing echo frequency (target velocity information) (*2*). The DSCF processing area consists of two functional subdivisions adapted for target detection or localization (*3*). The FM and CF/CF areas process information carried by different combinations of information-bearing elements in the emitted biosonar signal and its echo (*4–6*). We report that the FM processing area represents target-range information along an anatomical axis without a corresponding anatomical dimension at the periphery.

The mustache bat emits biosonar signals (orientation sounds), each of which contains four harmonics. Each harmonic consists of a CF component and an FM component. Therefore, there are eight components ($CF_{1–4}$, $FM_{1–4}$) in each emitted signal (*1, 5, 7*). Echoes that elicit behavioral responses in the mustache bat always overlap with the emitted signal (inset, Fig. 1C). As a result, biosonar information must be extracted from a complex sound with up to 16 components.

Neurons in the FM processing area are maximally excited only when an echo from an orientation sound arrives after a particular delay. The essential elements in such paired stimuli are the first harmonic FM component (FM_1) in the orientation sound and one or more higher harmonic FM components ($FM_{2–4}$) in the echo. Therefore, these neurons are called FM_1–FM_n facilitation neurons (*4, 5*).

One of the most important aspects of echolocation is ranging. The primary cue for ranging is the delay of the echo from the emitted sound. The FM_1–FM_n facilitation neurons are sensitive to this delay and are therefore range-sensitive. Range-sensitive neurons can be classified into two categories, tracking and range-tuned. The best delays (BD's) (*8*) of tracking neurons shorten and their delay-tuning curves become narrower as the bat changes the signal repetition rate and duration as it approaches a target. These neurons zero in on the target, rejecting echoes from more distant objects (*4, 5*). Range-tuned neurons, on the other hand, are tuned to particular echo delays, regardless of repetition rate and duration of paired stimuli. They respond to the target only when it is within a certain narrow range (*5*). The obvious question is whether range-tuned neurons with different BD's (that is, best ranges) are systematically arranged along an axis in the FM processing area to represent target range information.

Experiments were performed with mustache bats collected in Panama. The activity of single neurons was recorded in unanesthetized bats with a tungsten wire electrode (5- to 10-μm tip) during the period from 4 days to 4 weeks after surgery to expose the skull. When necessary, local anesthetic (Xylocaine) and tranquilizer (droperidol) were administered. Acoustic stimuli were pure (CF) tones, FM sounds, and combinations of them that mimicked the biosonar signal-echo pair in the search, approach, and terminal phases of echolocation in this species (*9*). The stimuli were delivered from a loudspeaker 73 cm in front of the animal in a soundproof, echo-suppressed room. For details of the surgery and the stimulation and recording systems, see (*4*) and (*5*).

In the first stage of our experiment, we inserted an electrode orthogonal to the surface of the FM processing area and recorded single-unit activity at various depths to determine whether there was columnar organization for response parameters, such as best frequency, minimum threshold, and frequency bandwidth, with pure tones, FM sounds, and pairs of sounds used to elicit facilitation. We also measured BD, threshold at BD, and width of the delay-tuning curves with pairs of sounds eliciting the strongest facilitation. Neurons at depths between 200 and 1000 μm had nearly identical response characteristics, including BD's. (At depths less than 200 μm, the signal-to-noise ratio was usually small and responses to acoustic stimuli were poor.)

Confirmation of the columnar organization of BD's simplified our study of cortical representation of target range, because we could rely on the uniformity of activity at different depths in the cortex. To gather data from many locations in the cortical plane, we inserted the electrode at a 30° angle into the FM processing area; neuronal responses were studied at 200-μm intervals. We plotted BD's of range-tuned neurons only on a surface map of the cerebral cortex that was drawn prior to the recordings.

The FM processing area consists of three major clusters: FM_1–FM_3, FM_1–FM_4, and FM_1–FM_2 facilitation neurons (*4*), which are usually arranged dorsal to ventral in that order (Fig. 1B). For each electrode penetration through those clusters in the rostrocaudal direction, BD systematically varied. Figure 1B gives a schematic representation of the iso-BD contour lines that comprise a target-range axis. Neurons with extremely short BD's were recorded only at the

351

rostroventral part of the FM processing area. The shortest BD of a range-tuned neuron was 0.4 msec, corresponding to a target range of 6.9 cm. Neurons with very short BD's responded strongly to each paired stimulus even at a rate of 100 repetitions per second (the terminal phase). When BD was shorter than 2.0 msec, the FM component (2.0 msec) of the echo in the terminal phase overlapped that of the orientation sound. The delay-tuning curve for such a short BD is very sharp but nevertheless may cross the 0-msec delay line at 60 to 80 dB SPL. In that case, when the orientation sound is louder than 60 dB SPL, facilitation is evoked by the combination of different harmonics in the sound per se and is further augmented by an echo with a very short delay. Response latencies of range-tuned neurons to the echo FM are short—7 to 10 msec. Thus, the auditory cortex seems to be involved in informa-

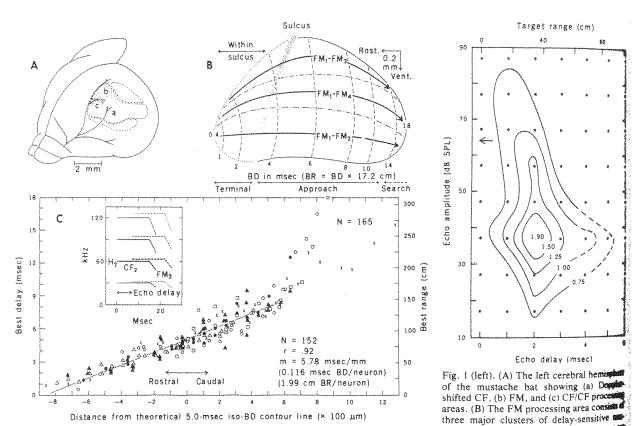tion processing even in the terminal phase of echolocation.

Neurons with long BD's were recorded at the caudal part of the FM processing area (Fig. 1B). The longest BD obtained was 18 msec, corresponding to a target range of 310 cm. The delay-tuning curves of such neurons are broad, and they responded strongly to each paired stimulus only when delivered at the lower repetition rates characteristic of the search phase. The response was very poor at a rate of 40 repetitions per second and completely disappeared at 100 per second.

The role of such neurons in range discrimination may be limited because of their broad delay-tuning curves. The population of neurons with best delay longer than 10 msec is small. The central part of the FM processing area is occupied by neurons with BD's between 4 and 7 msec. Their delay-tuning curves

are sharp and their responses are strong and clearly locked to each paired stimulus even at a rate of 100 repetitions per second. Neurons with BD's from 3 to 8 msec are distributed over a disproportionately large area. This suggests that processing of echoes from targets 50 to 140 cm away (the approach phase) is particularly important to the mustache bat.

Best delays were plotted as a function of distance from the 5.0-msec iso-BD contour line (Fig. 1C) (10). The correlation coefficient (r) for the BD's between 0 and 10 msec is .92 (N = 152). The slope (m) of the regression line is 5.78 msec BD per millimeter of cortical surface. Since the average interneuronal distance in the cortical plane of frozen sections of the brain is about 20 μm, adjacent neurons could express target range in 1.99-cm increments.

There is an interesting correspondence between these results and certain behav-

Fig. 1 (left). (A) The left cerebral hemisphere of the mustache bat showing (a) Doppler-shifted CF, (b) FM, and (c) CF/CF processing areas. (B) The FM processing area consists of three major clusters of delay-sensitive neurons: FM₁-FM₂, FM₁-FM₃, and FM₁-FM₄ facilitation neurons. Each cluster shows odotopic representation. Iso-BD contours and range axes are schematically shown by dashed lines and solid arrows, respectively. Best delays of 0.4 and 18 msec correspond to best ranges (BR's) of 7 and 310 cm. Range information in the search, approach, and terminal phases of echolocation is represented by activity at different loci in the cerebral hemisphere. (C) The relationship between BD (or BR) and distance along the cortical surface. The data were obtained from six cerebral hemispheres and are indicated by six different symbols. The regression line represents the average change in BD with distance. Since the 5.0-msec iso-BD contour line always crossed the central part of the FM processing area along the exposed surface of the cortex, the 5-msec BD on the regression line is used as a reference point to express distance (10). The inset is a schematized sonagram of an orientation sound and a Doppler-shifted echo in the approach phase of echolocation.   Fig. 2 (right). Iso-impulse-count contours representing the response magnitude of a range-tuned neuron plotted on the coordinates of echo amplitude against delay (or target range). Since the neuron was tuned to targets at a short distance, the orientation sound-echo pair for this plot was delivered at a repetition rate of 100 per second (terminal phase). Dots indicate where an average number of impulses per paired stimulus was obtained by presenting the identical paired stimulus 200 times. The contour lines are drawn on the basis of these data points. The dashed parts of the contour lines indicate where the responses were inflated by background noise associated with animal movement; SPL, sound pressure level.

al data. The little brown bat (*Myotis lucugus*) begins the approach phase for e obstacles 0.3 cm in diameter at an erage distance of 225 cm (*11*), and the rseshoe bat (*Rhinolophus ferrumequium*) compensates for Doppler-shifted hoes only when delayed less than an erage of 17.5 msec (301 cm) (*12*). The ding that bats react when targets are ser than 301 cm corresponds to our ding that the range axis ends at about 0 cm. *Eptescius fuscus, Phyllostomus satus, Pteronotus suapurensis*, and ferrumequinum are all able to discriminate range differences of 1.2 to 2.5 m at an absolute distance of 30 to 60 m (*13*). This also corresponds to our ding if we assume that the rate of nge in best range (1.99 cm per uron) is the theoretical limit of just-iceable difference in distance.

Delay-tuning curves themselves are metimes insufficient to express the operties of range-tuned neurons and y even be misleading. Their responses more appropriately expressed by impulse-count contours plotted on ordinates of echo amplitude against lay. In Fig. 2, for instance, the neuron clearly tuned to an echo of 37 dB SPL layed by 2.1 msec. Range information apparently processed by a series of ch neural filters in both the time and mplitude domains, and as such they may considered cross-correlators (*14*).

Odotopic representation is the term use to describe the representation of rget range by the location of neurons ned to different BD's. This represent-ion is the same regardless of wide iations in repetition rate (10 to 100 per cond) and signal duration (7 to 34 sec). In the auditory system, the nthesis of a range axis, which has no responding anatomical precursor in periphery, is suggestive of the ethods by which sensory information ay be extracted and displayed in the ain.

When many conspecific bats echolo-te in a confined space, their many entation sounds and echoes would pair odotopic representation unless me mechanism protected the system m jamming. The fundamental har-onic (H_1, particularly FM_1) of the entation sound is always critical to the sponse of range-tuned neurons in spite the fact that H_1 is always much aker than the other harmonics and is metimes barely detectable in labora-ry recordings. This means that range-ned neurons are probably not excited combinations of orientation sounds d echoes produced by bats flying arby. To excite range-tuned neurons,

H_1 must stimulate the ears prior to an echo in spite of its weakness in the emitted sound. This implies that H_1 produced by the vocal cords stimulates the animal's own ears by bone conduc-tion but is not emitted at a significant amplitude, possibly because of suppres-sion by vocal-tract antiresonance. In nature, range-tuned neurons would be selectively excited only when the animal itself emits orientation sounds and echoes return after particular short delays. Jamming is thereby avoided in most situations.

NOBUO SUGA, WILLIAM E. O'NEILL
Department of Biology, Washington University, St. Louis, Missouri 63130

References and Notes

1. N. Suga, *Fed. Proc. Fed. Am. Soc. Exp. Biol.* **37**, 2342 (1978); ———, and P. H.-S. Jen, *Science* **194**, 542 (1976).
2. N. Suga, *Science* **196**, 64 (1977).
3. T. Manabe, N. Suga, J. Ostwald, *ibid.* **200**, 339 (1978).
4. N. Suga, W. E. O'Neill, T. Manabe, *ibid.*, p. 778.
5. W. E. O'Neill and N. Suga, *ibid.* **203**, 69 (1979).
6. N. Suga, W. E. O'Neill, T. Manabe, *ibid.*, p. 270.
7. A. Novick and J. R. Vaisnys, *Biol. Bull. (Woods Hole)* **127**, 478 (1964).
8. The best delay is the echo delay at which the minimum threshold for facilitation is obtained. Best delay corresponds to the best range of a neuron.
9. For mimicking orientation sounds and echoes (inset, Fig. 1C) (*4, 5*) in the three phases of echo-location, the repetition rate of paired stimuli and the durations of the CF and FM components of the signal were, respectively, 10 per second, 30 msec, and 4 msec (search phase); 40 per second, 15 msec, and 3 msec (approach phase); and 100 per second, 5 msec, and 2 msec (terminal phase). Synthesized echoes were independently varied in frequency, amplitude, and delay from the synthesized orientation sounds. To identify which combination of signal components was essential for excitation of neurons, both the syn-thesized orientation sounds and echoes were in-dependently simplified by eliminating individual signal components.
10. The sulcus cannot be used as an anatomical ref-erence line since iso-BD contour lines are nei-ther straight nor parallel to it. In each oblique electrode penetration, BD's between 4 and 6 msec were recorded. Therefore, the data for each entire penetration were shifted to be in reg-ister with those values. The relative distances between individual data points within each pen-etration are not affected by this technique.
11. A. D. Grinnell and D. R. Griffin, *Biol. Bull. Woods Hole* **114**, 10 (1958).
12. G. Schuller, *Naturwissenschaften* **61**, 171 (1974).
13. J. A. Simmons, *Ann. N.Y. Acad. Sci.* **188**, 161 (1971); ———, D. J. Howell, N. Suga, *Am. Sci.* **63**, 204 (1975).
14. N. Suga, *Shizen* **79-6**, 70 (1979).
15. We thank J. Jaeger for his assistance in our audi-tory laboratory and E. G. Jones for kindly pro-viding frozen sections of the brain of the mus-tache bat. Supported by NSF grant BNS 78-12987 to N.S. and by PHS training grant 1-T32-NS07057-01 to W.E.O.

30 March 1979; revised 2 July 1979

Laser-EXAFS: Fast Extended X-ray Absorption Fine Structure Spectroscopy with a Single Pulse of Laser-Produced X-rays

Abstract. *The extended x-ray absorption fine structure (EXAFS) spectrum of aluminum has been measured with a nanosecond pulse of soft x-rays generated by a laser-produced plasma. This technique provides a practical alternative to synchro-tron radiation for the acquisition of EXAFS data. It also provides a unique capability for the analysis of molecular structure in highly transient chemical species.*

Determining the identities and exact spatial arrangement of the atoms sur-rounding any particular atom in a mole-cule is fundamental to understanding the properties of any type of liquid, gas, or solid. In the case of materials with long-range order, such as perfect crystals, this information can often be obtained with x-ray or particle beam diffraction tech-niques. Such diffraction techniques rely on the fact that all of the atoms in a per-fect lattice reside at fixed, periodic dis-tances from any given atom, and that this periodicity is retained regardless of how far one moves within the lattice from the atom in question.

For materials without long-range or-der, the diffraction techniques are far less useful; one can determine local con-figurations in this way only for relatively simple molecules composed of a single element. For more complicated mole-cules, considerable insight can often be gained from optical spectroscopy and magnetic resonance techniques. How-ever, these techniques have the draw-back of providing only indirect evidence, from which the structural parameters of interest for a molecule must be inferred.

Many of these limitations can be over-come with the recently developed tech-nique of extended x-ray absorption fine structure (EXAFS) spectroscopy (*1, 2*). In EXAFS spectroscopy, the x-ray ab-sorption coefficient of a material is mea-sured as a function of energy from the K edge or L edge of a specific element in the material to as far as 1000 eV above the edge. The absorption of x-rays by the element is accompanied by the ejection of photoelectrons, which can be scat-tered from neighboring atoms. Backscat-tering of these photoelectrons from atoms in the immediate vicinity of the absorbing atom gives rise to a periodic "wiggle" structure in the x-ray absorp-tion spectrum (*1, 3, 4*). By analyzing this wiggle structure above the absorption

353